

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 36 TOWNSHIP 15 RANGE 4

DATE: 6-30-06

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 3-10-01

IN. S.P.C. E ZONE NAD '83

NAME: 15043609

N: 493814.5170(m)

E: 69221.7260(m)

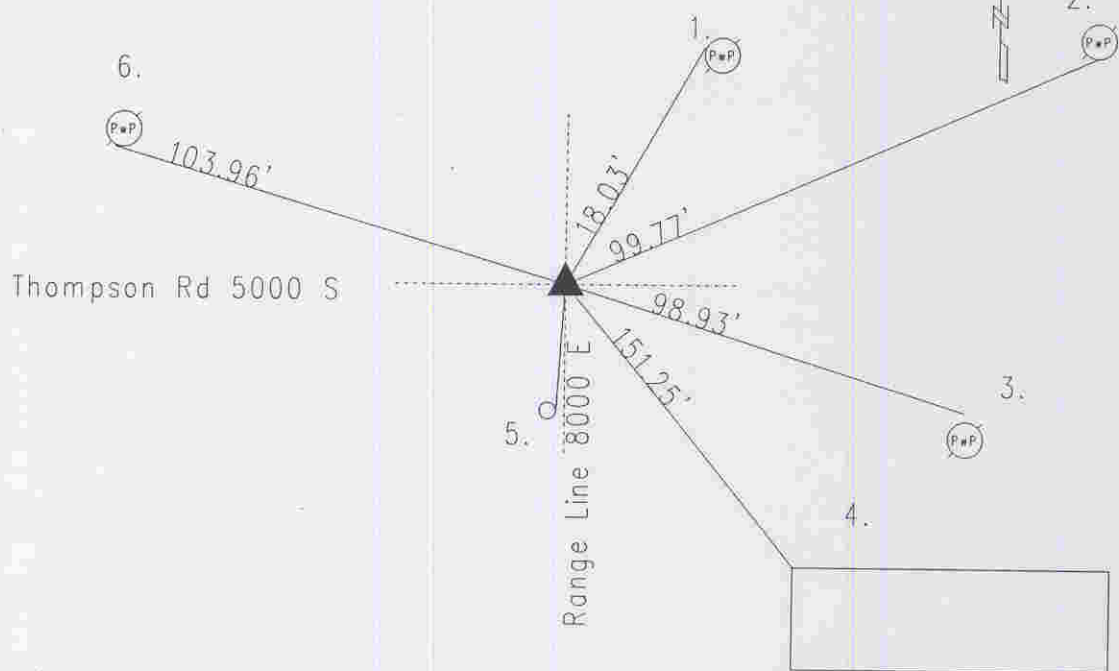

Original post set 1820 by Hendricks with witness: 18" beech S 85 E 35 links; 20" lynn S 67 W 12 links per Marion County Atlas pg. 9. 12-20-1852 Hosbrook called witness 20" lynn N 142 links per Franklin Township Legal Survey Book pg. 18. Reference (no date) called stone. SE 36-15-4 (no date) called for stone. Reference (no date) NW 6-14-5 called stone. SW 31-15-5 (no date) called stone. 11-29-54 called for iron pin over stone. 3-20-75 SE 36-15-4 called for railroad spike over stone. Excavated 7-25-86 and stone found 24" down. Harrison set. Re-tied 7-26-96 by Kiste. Re-tied 3-10-01 by Whiteside. Re-tied 6-30-06 by Wilcoxon.

15043609

REF.	DISTANCE	DESCRIPTION
1.	18.03'	PK nail W PwP#140-710 14"up
2.	99.77'	PK nail S PwP#31-710 18"up
3.	98.93'	PK nail N PwP#122-710 14"up
4.	151.25'	NW corner of aluminum barn ADDRESS 8027
5.	22.11'	Due S to PK nail F wooden post
6.	103.96'	Mag nail w/bw S PwP#180-170 24"up